
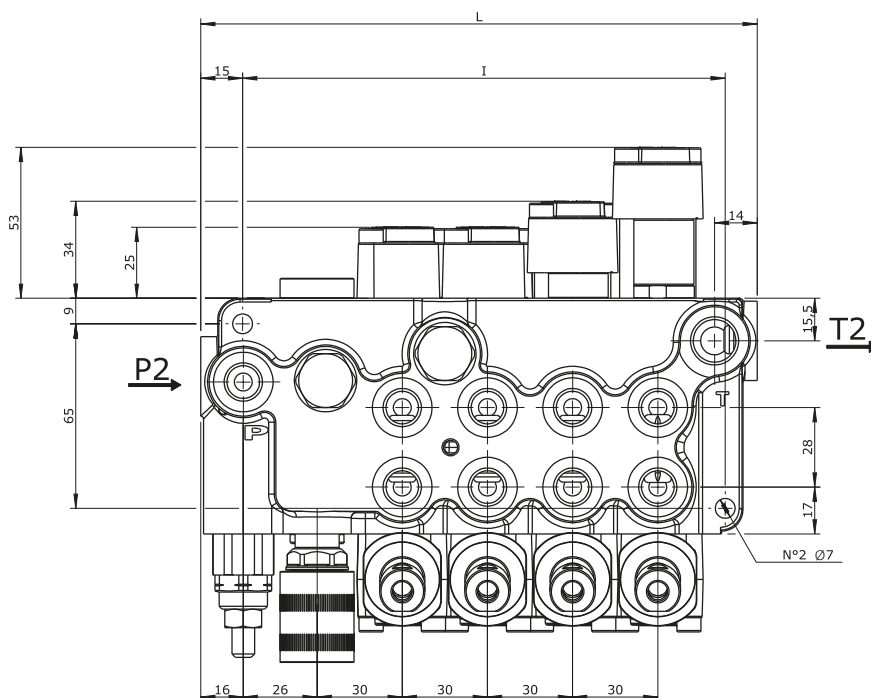


BF201 / BFV201

TECHNICAL SPECIFICATIONS

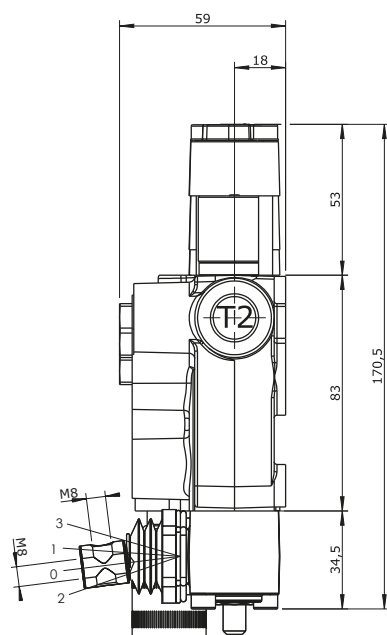

TECHNICAL SPECIFICATIONS

NOMINAL FLOW	17 l/min	4,5 GPM
MAX FLOW	25 l/min	6,6 GPM
MAX PRESSURE ON PORTS	320 bar	4700 PSI
MAX PRESSURE ON TANK LINE	80 bar	1100 PSI

STANDARD THREADS

	A - B	P	T	P2	T2
G (BSP)	1/4"	1/4"	3/8"	3/8"	3/8"
F (UNF - SAE 6)	9/16"-18	9/16"-18	3/4"-16	3/4"-16	3/4"-16

INTERNAL OIL LEAKAGE

A - B → T 4 ÷ 8 cc/min

TESTING CONDITIONS


Pressure	100 bar
Oil temperature	40° C
Oil viscosity	32 mm²/s

DIMENSION AND WEIGHT


Number of sections	L		l		WEIGHT	
	mm	inch	mm	inch	kg	lb
BF201/1	107,00	4,21	80,00	3,15	2,49	5,49
BF201/2	136,00	5,35	110,00	4,33	3,35	7,38
BF201/3	166,00	6,54	140,00	5,51	4,45	9,81
BF201/4	196,00	7,72	170,00	6,69	7,60	16,75
BF201/5	226,00	8,90	200,00	7,87	8,30	18,30

PRESSURE DROP

P → T

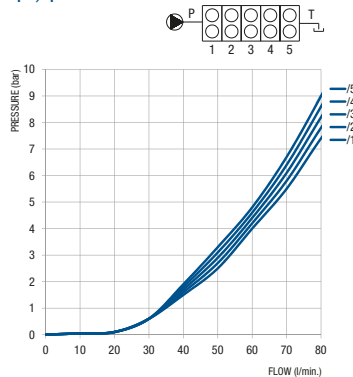

P → A/B

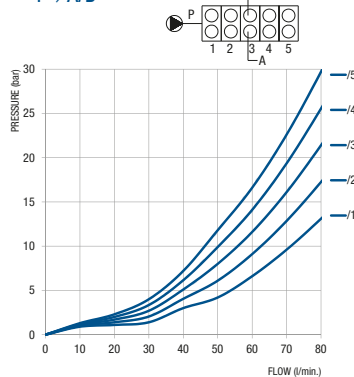

A/B → T

