


BM45

Single section valve
Flow 45 l/min
Ports threads 1/2" BSP / SAE 10

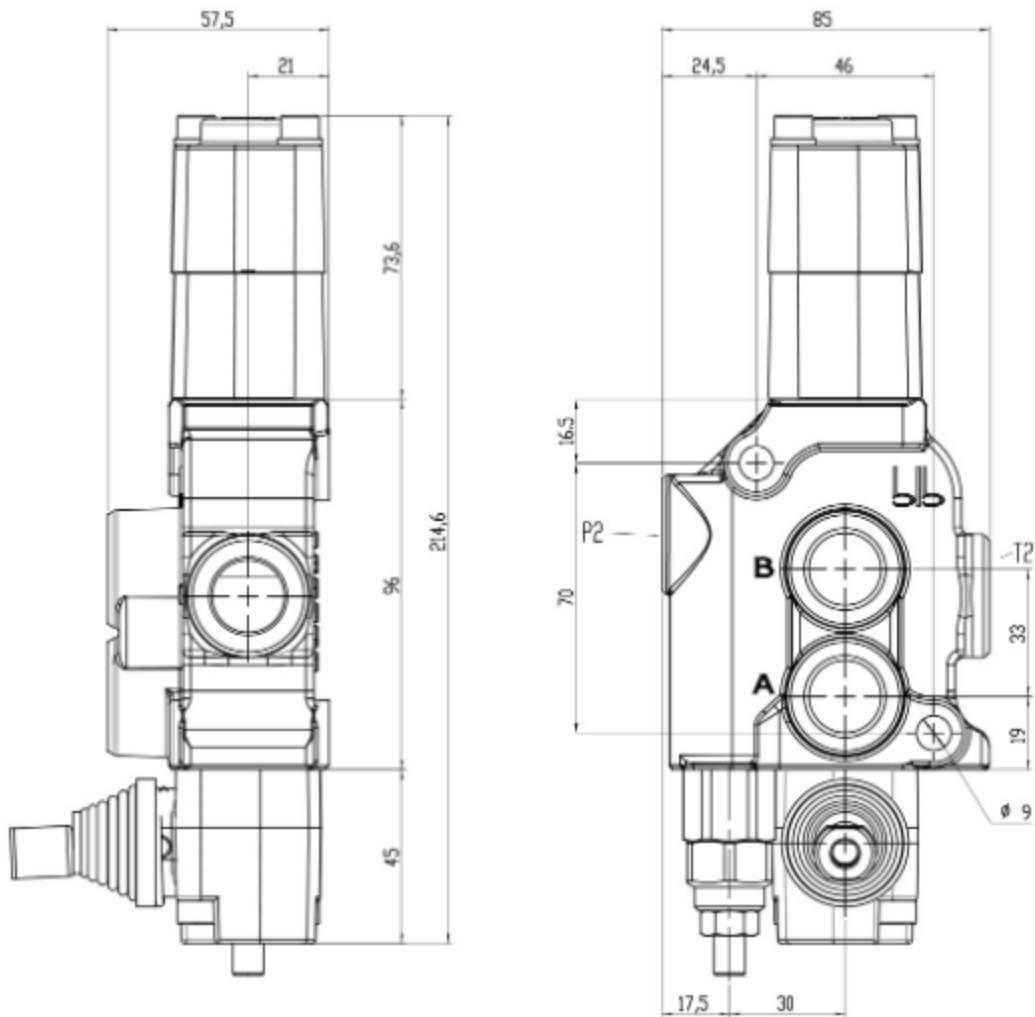

SPECIFICHE TECNICHE / TECHNICAL SPECIFICATIONS		
PORTATA NOMINALE / NOMINAL FLOW	45 L/min	12 GPM
PORTATA MAX / MAX FLOW	60 L/min	15,9 GPM
PRESSIONE NOMINALE / NOMINAL PRESSURE	250 bar	3600 PSI
PRESSIONE MAX SUGLI UTILIZZI / MAX PRESSURE ON PORTS	320 bar	4700 PSI
CONTROPRESSIONE MAX ALLO SCARICO / MAX PRESSURE ON TANK LINE	80 bar	1100 PSI

FILETTATURE STANDARD / STANDARD THREADS			
	A - B	P2	T2
G (BSP)	1/2"	1/2"	1/2"
F (UNF - SAE 10)	7/8"-14	7/8"-14	7/8"-14

TRAFILAMENTI INTERNI / INTERNAL OIL LEAKAGE	
A - B → T	4 ÷ 8 cc/min
CONDIZIONI DI TEST / TESTING CONDITIONS	
PRESSIONE / PRESSURE	100 bar
TEMPERATURA DELL'OLIO / OIL TEMPERATURE	40 °C
VISCOSITÀ DELL'OLIO / OIL VISCOSITY	32 mm²/s

DIMENSIONI / DIMENSIONS				
N. DI SEZIONI N. OF SECTIONS	L		I	
	mm	inch	mm	inch
BM45	85	3,35	46	1,81

PERDITE DI CARICO / PRESSURE DROP

