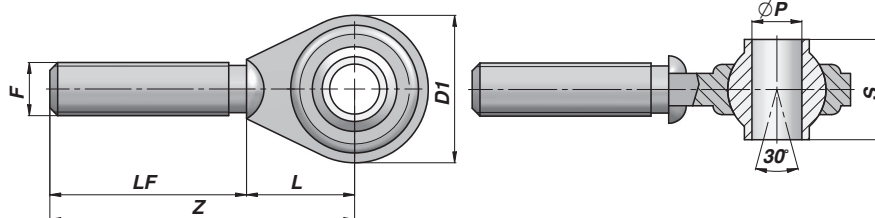



CSTF



TIRANT FILETE AVEC ROTULE RADIALE
BALL-JOINT END WITH THREADED STEM

Code Code	CAT	ØP (A12)	Z	S (h11)	D1	F	LF	L	note	kg
CSTF010333	1	19.0	165	44	62	M24x3	115	50	DX	0,86
CSTF010334	1	19.0	165	44	62	M24x3	115	50	SX	0,86
CSTF010340	1	19.0	205	44	58	M27x3	155	50	DX	1,08
CSTF010350	1	19.0	205	44	58	M27x3	155	50	SX	1,08
CSTF010355	1	19.0	225	44	62	M30x3	175	50	DX	1,36
CSTF010356	1	19.0	225	44	62	M30x3	175	50	SX	1,36
CSTF010335	2	25.4	220	51	75	M24x3	165	55	DX	1,32
CSTF010336	2	25.4	220	51	75	M24x3	165	55	SX	1,32
CSTF010380	2	25.4	220	51	75	M27x3	165	55	DX	1,44
CSTF010390	2	25.4	220	51	75	M27x3	165	55	SX	1,44
CSTF010400	2	25.4	220	51	75	M30x3	165	55	DX	1,62
CSTF010410	2	25.4	220	51	75	M30x3	165	55	SX	1,62
CSTF010420	2	25.4	220	51	80	M36x3	165	55	DX	2,14
CSTF010430	2	25.4	220	51	80	M36x3	165	55	SX	2,14
CSTF010460	3	32.0	270	51	96	M36x3	200	70	DX	3,34
CSTF010470	3	32.0	270	51	96	M36x3	200	70	SX	3,34

MATERIEL : ACIER C40 - UNI EN 10083-1

MATERIAL : STEEL C40 - UNI EN 10083-1

CSTGG

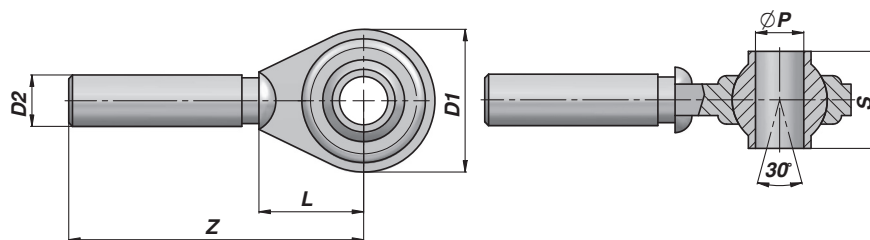TIRANT A QUEUE LISSE AVEC ROTULE RADIALE
BALL-JOINT END WITH ROUND STEM


Code Code	CAT	ØP (A12)	Z	S (h11)	D1	D2	L	kg
CSTGG10305	1	19.0	165	44	58	20	50	0,71
CSTGG10312	1	19.0	165	44	58	22	50	0,82
CSTGG10325	1	19.0	165	44	62	25	50	0,98
CSTGG10342	1	19.0	205	44	58	25	50	1,14
CSTGG10343	1	19.0	225	44	62	29	50	1,50
CSTGG10395	2	25.4	220	51	75	30	55	1,76
CSTGG10425	2	25.4	220	51	80	36	55	2,32
CSTGG10445	2	25.4	270	51	96	37	75	3,80
CSTGG10455	3	32.0	270	51	96	37	75	3,70
CSTGG10474	2	25.4	230	51	80	43	60	3,20

MATERIEL : ACIER C40 - UNI EN 10083-1

MATERIAL : STEEL C40 - UNI EN 10083-1

TIRANTE FILETTATO CON ROTULA SFERICA
ACCOPIAMENTO ACCIAIO SU ACCIAIO - CORPO IN ACCIAIO C 40 UNI EN 10083-1



END ASSEMBLIES
COUPLING STEEL ON STEEL - ROD END OF STEEL C 40 UNI EN 10083-1

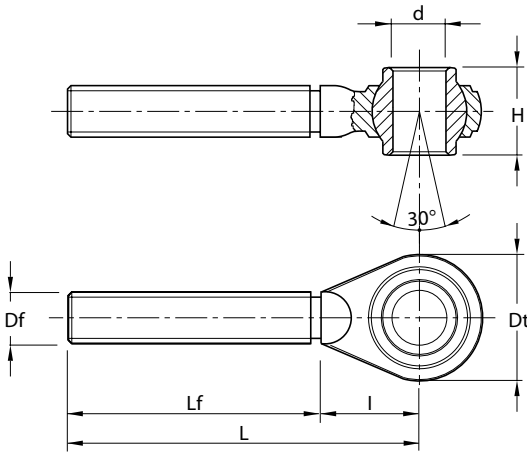

SIGLA ARTICLE	CAT.	d (A12)	H (h11)	Df	L	Lf	I	Dt	PESO IN Kg. WEIGHT Kg.
TF 10300 DX	1	19	44	M22X2.5	165	115	50	58	0.71
TF 10310 SX	1	19	44	M22X2.5	165	115	50	58	0.71
TF 10320 DX	1	19	44	M24X2.5	165	115	50	58	0.82
TF 10330 SX	1	19	44	M24X2.5	165	115	50	58	0.82
TF 10321 DX	1	19	44	M24X2.5	165	115	50	62	0.85
TF 10322 SX	1	19	44	M24X2.5	165	115	50	62	0.85
TF 10333 DX	1	19	44	M24X3	165	115	50	62	0.86
TF 10334 SX	1	19	44	M24X3	165	115	50	62	0.86
TF 10338 DX	1	19	44	M24X3	205	155	50	62	0.98
TF 10339 SX	1	19	44	M24X3	205	155	50	62	0.98
TF 10335 DX	2	25.4	51	M24X3	220	165	55	75	1.32
TF 10336 SX	2	25.4	51	M24X3	220	165	55	75	1.32
TF 10340 DX	1	19	44	M27X3	205	155	50	58	1.08
TF 10350 SX	1	19	44	M27X3	205	155	50	58	1.08
TF 10345 DX	1	19	44	M27X3	205	155	50	62	1.12
TF 10346 SX	1	19	44	M27X3	205	155	50	62	1.12
TF 10380 DX	2	25.4	51	M27X3	220	165	55	75	1.44
TF 10390 SX	2	25.4	51	M27X3	220	165	55	75	1.44
TF 10355 DX	1	19	44	M30X3	225	175	50	62	1.36
TF 10356 SX	1	19	44	M30X3	225	175	50	62	1.36
TF 10400 DX	2	25.4	51	M30X3	220	165	55	75	1.62
TF 10410 SX	2	25.4	51	M30X3	220	165	55	75	1.62
TF 10358 DX	1	19	44	M30X3.5	225	175	50	62	1.34
TF 10359 SX	1	19	44	M30X3.5	225	175	50	62	1.34
TF 10415 DX	2	25.4	51	M30X3.5	220	165	55	75	1.60
TF 10416 SX	2	25.4	51	M30X3.5	220	165	55	75	1.60
TF 10420 DX	2	25.4	51	M36X3	220	165	55	80	2.14
TF 10430 SX	2	25.4	51	M36X3	220	165	55	80	2.14
TF 10440 DX	2	25.4	51	M36X3	270	200	70	96	3.44
TF 10450 SX	2	25.4	51	M36X3	270	200	70	96	3.44
TF 10460 DX	3	32	51	M36X3	270	200	70	96	3.34
TF10470 SX	3	32	51	M36X3	270	200	70	96	3.34
TF 10475 DX	2	25.4	51	M40X3	230	170	60	80	2.74
TF 10476 SX	2	25.4	51	M40X3	230	170	60	80	2.74

CROCHET SUPERIEUR "RAPID" A SOUDER
WELD ON TOP LINK AUTOMATIC HITCH

CSGR

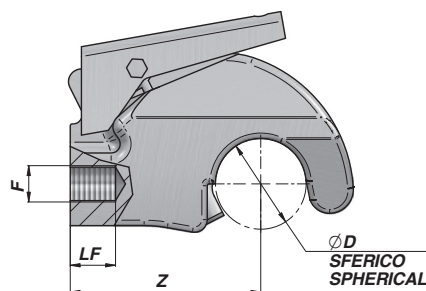


Code Code	CAT	ØD	Z	F	LF	kg	CSF
CSGR010975	2	50	105	Ø12	15	2,02	10989 - 10985
CSGR010976	2	50	105	M20x1.5	25	1,96	10989 - 10985
CSGR010969	2	50	105	M27x2	25	2,10	10989 - 10985
CSGR010974	2	50	105	M30x2	25	2,30	10989 - 10985
CSGR010977	3/2	60	132	Ø20	25	4,50	10987 - 10988
CSGR010979	3/2	60	132	M27x2	45	4,24	10987 - 10988
CSGR010970	3/2	60	132	M36x2	45	4,04	10987 - 10988

MATERIEL : ACIER 35CrMn5 BONIFIE
MATERIAL : STEEL 35CrMn5 RECLAIMED

ROTULE POUR CROCHET SUPERIEUR "RAPID"
BALL FOR UPPER AUTOMATIC HITCH

CSF



Code Code	CAT	ØP (A12)	ØD	S	kg
CSF0010989	1	19.0	50	51	0,42
CSF0010985	2	25.4	50	51	0,34
CSF0010987	3/2	25.4	60	51	0,64
CSF0010988	3	32.0	60	51	0,54


MATERIEL : ACIER C10 + TRAITEMENT DE CEMENTATION HRC 58-62
MATERIAL : STEEL C10 + CASE-HARDENING TREATMENT

GANCIO SUPERIORE "RAPID" A SALDARE
- CAT. 2 - 3 PER CILINDRI IDRAULICI
WELD ON TOP LINK AUTOMATIC HITCH

SIGLA ARTICLE	CAT.	D	L	Df (DX-RHS)	Pf	PESO IN Kg. WEIGHT Kg.
GR 10975	2	50	105	FORO/BORE Ø12	15	2.02
GR 10976	2	50	105	M20X1.5	25	1.96
GR 10969	2	50	105	M27X2	25	2.10
*GR 10974	2	50	105	M30X2	25	2.30
GR 10977	3/2	60	132	FORO/BORE Ø20	25	4.50
GR 10979	3/2	60	132	M27X2	45	4.24
** GR 10970	3/2	60	132	M36X2	45	4.04

* A RICHIESTA M24x2 - ** A RICHIESTA M30x2

* ON REQUEST M24x2 - ** ON REQUEST M30x2

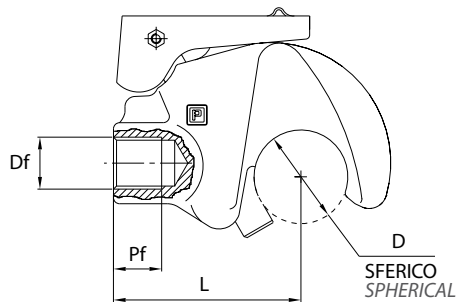

ROTULE PER GANCIO RAPIDO SUPERIORE
BALLS FOR UPPER AUTOMATIC HITCH

SIGLA ARTICLE	CAT.	d (A12)	D	H (h11)	PESO IN Kg. WEIGHT Kg.
SF 10989	1	19	50	51	0.42
SF 10985	2	25.4	50	51	0.34
SF 10987	3/2	25.4	60	51	0.64
SF 10988	3	32	60	51	0.54

