





BR

Embout à Bride SAE 3000 PSI (Monobloc) STRAIGHT SAE FLANGE 3000 PSI ONE PIECE




Référence part nr.	Référence UNIDRO	Diamètre Tuyau		Désignation	Collet		Référence Pré-sertis
		in	mm		in	mm	
1260-08-08	R1260.0808	1/2	12,7	CS13 BR30	1/2	30,2	1260G08-08
1260-08-12	R1260.0812	1/2	12,7	CS13 BR38	3/4	38,1	1260G08-12
1260-10-08	R1260.1008	5/8	15,9	CS16 BR30	1/2	30,2	1260G10-08
1260-10-12	R1260.1012	5/8	15,9	CS16 BR38	3/4	38,1	1260G10-12
1260-12-12	R1260.1212	3/4	19	CS19 BR38	3/4	38,1	1260G12-12
1260-12-16	R1260.1216	3/4	19	CS19 BR44	1	44,5	1260G12-16
1260-16-12	SUR CDE	1	25,4	CS25 BR38	3/4	38,1	1260G16-12
1260-16-16	R1260.1616	1	25,4	CS25 BR44	1	44,5	1260G16-16
1260-16-20	R1260.1620	1	25,4	CS25 BR51	1.1/4	50,8	1260G16-20
1260-20-20	R1260.2020	1.1/4	31,8	CS32 BR51	1.1/4	50,8	
1260-20-24	R1260.2024	1.1/4	31,8	CS32 BR60	1.1/2	60,3	
1260-24-24	R1260.2424	1.1/2	38,1	CS38 BR60	1.1/2	60,3	
1260-24-32	R1260.2432	1.1/2	38,1	CS38 BR71	2	71,4	
1260-32-32	R1260.3232	2	50,8	CS50 BR71	2	71,4	
1260-32-40	R1260.3240	2	50,8	CS50 BR84	2.1/2	84,1	

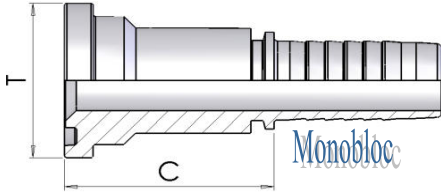


Bouchons (page 13)

BR 90

Embout à Bride SAE 3000 PSI - Coudé 90° (Monobloc) 90° SAE FLANGE 3000 PSI ONE PIECE




Référence part nr.	Référence UNIDRO	Diamètre Tuyau		Désignation	Collet		Référence Pré-sertis
		in	mm		in	mm	
1060-08-08	R1060.0808	1/2	12,7	CS13 BR30 90°	1/2	30,2	1060G08-08
1060-08-12	R1060.0812	1/2	12,7	CS13 BR38 90°	3/4	38,1	1060G08-12
1060-10-08	R1060.1008	5/8	15,9	CS16 BR30 90°	1/2	30,2	1060G10-08
1060-10-12	R1060.1012	5/8	15,9	CS16 BR38 90°	3/4	38,1	1060G10-12
1060-12-12	R1060.1212	3/4	19	CS19 BR38 90°	3/4	38,1	1060G12-12
1060-12-16	R1060.1216	3/4	19	CS19 BR44 90°	1	44,5	1060G12-16
1060-16-12	SUR CDE	1	25,4	CS25 BR38 90°	3/4	38,1	1060G16-12
1060-16-16	R1060.1616	1	25,4	CS25 BR44 90°	1	44,5	1060G16-16
1060-16-20	R1060.1620	1	25,4	CS25 BR51 90°	1.1/4	50,8	1060G16-20
1060-20-20	R1060.2020	1.1/4	31,8	CS32 BR51 90°	1.1/4	50,8	
1060-20-24	R1060.2024	1.1/4	31,8	CS32 BR60 90°	1.1/2	60,3	
1060-24-24	R1060.2424	1.1/2	38,1	CS38 BR60 90°	1.1/2	60,3	
1060-24-32	R1060.2432	1.1/2	38,1	CS38 BR71 90°	2	71,4	
1060-32-32	R1060.3232	2	50,8	CS50 BR71 90°	2	71,4	

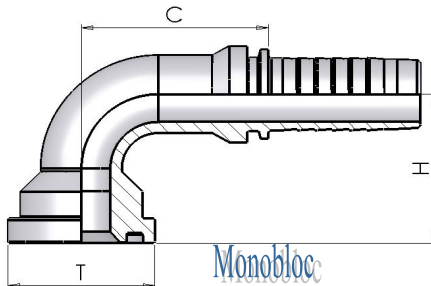



BR 45

Embout à Bride SAE 3000 PSI - Coudé 45° (Monobloc) 45° SAE FLANGE 3000 PSI ONE PIECE



Référence part nr.	Référence UNIDRO	Diamètre Tuyau		Désignation	Collet		Référence Pré-sertis
		in	mm		in	mm	
1160-08-08	R1160.0808	1/2	12,7	CS13 BR30 45°	1/2	30,2	1160G08-08
1160-08-12	R1160.0812	1/2	12,7	CS13 BR38 45°	3/4	38,1	1160G08-12
1160-10-08	SUR CDE	5/8	15,9	CS16 BR30 45°	1/2	30,2	1160G10-08
1160-10-12	SUR CDE	5/8	15,9	CS16 BR38 45°	3/4	38,1	1160G10-12
1160-12-12	R1160.1212	3/4	19	CS19 BR38 45°	3/4	38,1	1160G12-12
1160-12-16	R1160.1216	3/4	19	CS19 BR44 45°	1	44,5	1160G12-16
1160-16-12	SUR CDE	1	25,4	CS25 BR38 45°	3/4	38,1	1160G16-12
1160-16-16	R1160.1616	1	25,4	CS25 BR44 45°	1	44,5	1160G16-16
1160-16-20	R1160.1620	1	25,4	CS25 BR51 45°	1.1/4	50,8	1160G16-20
1160-20-20	R1160.2020	1.1/4	31,8	CS32 BR51 45°	1.1/4	50,8	
1160-20-24	R1160.2024	1.1/4	31,8	CS32 BR60 45°	1.1/2	60,3	
1160-24-24	R1160.2424	1.1/2	38,1	CS38 BR60 45°	1.1/2	60,3	
1160-24-32	R1160.2432	1.1/2	38,1	CS38 BR71 45°	2	71,4	
1160-32-32	R1160.3232	2	50,8	CS50 BR71 45°	2	71,4	

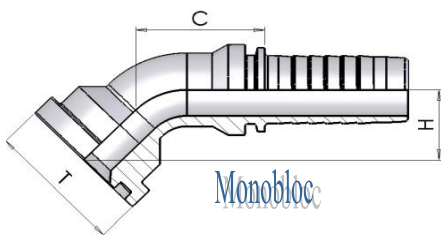


BR-3 90 L

**BRIDE 90° SAE 3000 PSI MONOBLOC - PROLONGEE
90° SAE FLANGE 3000 PSI ONE PIECE - LONG DROP**

Référence part nr.	Référence UNIDRO	Diamètre Tuyau		Désignation	Collet		H mm
		in	mm		in	mm	
FS3L-08-08	RFS3L.0808	1/2	12,7	CS13 BRL30 90°	1/2	30,2	73
FS3L-12-12	RFS3L.1212	3/4	19	CS19 BRL38 90°	3/4	38.1	123
FS3L-16-16	RFS3L.1616	1	25,4	CS25 BRL44 90°	1	44.5	127
FS3L-20-20	RFS3L.2020	1.1/4	31,8	CS32 BRL51 90°	1.1/4	50.8	178
FS3L-24-24	RL3LFS.2424	1.1/2	38,1	CS38 BRL60 90°	1.1/2	60.3	220