





## BR-6

### Embout à Bride SAE 6000 PSI (Monobloc) STRAIGHT SAE FLANGE 6000 PSI ONE PIECE




Référence part nr.	Référence UNIDRO	Diamètre Tuyau		Désignation	Collet		Référence Pré-sertis
		in	mm		in	mm	
1310-08-08	R1310.0808	1/2	12,7	CS13 BR632	1/2	32	1310G08-08
1310-08-12	R1310.0812	1/2	12,7	CS13 BR641	3/4	41.3	1310G08-12
1310-10-08	R1310.1008	5/8	15,9	CS16 BR632	1/2	31.7	1310G10-08
1310-10-12	R1310.1012	5/8	15,9	CS16 BR641	3/4	41.3	1310G10-12
1310-12-12	R1310.1212	3/4	19	CS19 BR641	3/4	41.3	1310G12-12
1310-12-16	R1310.1216	3/4	19	CS19 BR648	1	47.6	1310G12-16
1310-16-12	R1310.1612	1	25,4	CS25 BR641	3/4	41.3	1310G16-12
1310-16-16	R1310.1616	1	25,4	CS25 BR648	1	47.6	1310G16-16
1310-16-20	R1310.1620	1	25,4	CS25 BR654	1.1/4	54	1310G16-20
1310-20-20	R1310.2020	1.1/4	31,8	CS32 BR654	1.1/4	54	
1310-20-24	R1310.2024	1.1/4	31,8	CS32 BR663	1.1/2	63.5	
1310-24-24	R1310.2424	1.1/2	38,1	CS38 BR663	1.1/2	63.5	
1310-24-32	R1310.2432	1.1/2	38,1	CS38 BR680	2	79.4	
1310-32-32	R1310.3232	2	50,8	CS50 BR680	2	79.4	

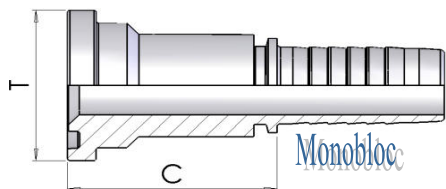


Joint (page 46)

## BR 6 90

### Embout à Bride SAE 6000 PSI - Coudé 90° (Monobloc) 90° SAE FLANGE 6000 PSI ONE PIECE




Référence part nr.	Référence UNIDRO	Diamètre Tuyau		Désignation	Collet		Référence Pré-sertis
		in	mm		in	mm	
1110-08-08	R1110.0808	1/2	12,7	CS13 BR632 90°	1/2	32	1110G08-08
1110-08-12	R1110.0812	1/2	12,7	CS13 BR641 90°	3/4	41.3	1110G08-12
1110-10-08	R1110.1008	5/8	15,9	CS16 BR632 90°	1/2	31.7	1110G10-08
1110-10-12	R1110.1012	5/8	15,9	CS16 BR641 90°	3/4	41.3	1110G10-12
1110-12-12	R1110.1212	3/4	19	CS19 BR641 90°	3/4	41.3	1110G12-12
1110-12-16	R1110.1216	3/4	19	CS19 BR648 90°	1	47.6	1110G12-16
1110-16-12	R1110.1612	1	25,4	CS25 BR641 90°	3/4	41.3	1110G16-12
1110-16-16	R1110.1616	1	25,4	CS25 BR648 90°	1	47.6	1110G16-16
1110-16-20	R1110.1620	1	25,4	CS25 BR654 90°	1.1/4	54	1110G16-20
1110-20-20	R1110.2020	1.1/4	31,8	CS32 BR654 90°	1.1/4	54	
1110-20-24	R1110.2024	1.1/4	31,8	CS32 BR663 90°	1.1/2	63.5	
1110-24-24	R1110.2424	1.1/2	38,1	CS38 BR663 90°	1.1/2	63.5	
1110-24-32	R1110.2432	1.1/2	38,1	CS38 BR680 90°	2	79.4	
1110-32-32	R1110.3232	2	50,8	CS50 BR680 90°	2	79.4	

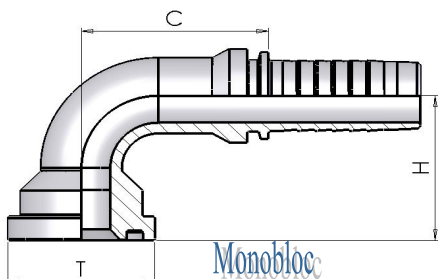



## BR6 45

### Embout à Bride SAE 6000 PSI - Coudé 45° (Monobloc) 45° SAE FLANGE 6000 PSI ONE PIECE



Référence part nr.	Référence UNIDRO	Diamètre Tuyau		Désignation	Collet		Référence Pré-sertis
		in	mm		in	mm	
1210-08-08	R1210.0808	1/2	12,7	CS13 BR632 45°	1/2	32	1210G08-08
1210-08-12	R1210.0812	1/2	12,7	CS13 BR641 45°	3/4	41.3	1210G08-12
1210-10-08	R1012.1008	5/8	15,9	CS16 BR632 45°	1/2	31.7	1210G10-08
1210-10-12	R1012.1012	5/8	15,9	CS16 BR641 45°	3/4	41.3	1210G10-12
1210-12-12	R1210.1212	3/4	19	CS19 BR641 45°	3/4	41.3	1210G12-12
1210-12-16	R1210.1216	3/4	19	CS19 BR648 45°	1	47.6	1210G12-16
1210-16-12	R1012.1612	1	25,4	CS25 BR641 45°	3/4	41.3	1210G16-12
1210-16-16	R1210.1616	1	25,4	CS25 BR648 45°	1	47.6	1210G16-16
1210-16-20	R1210.1620	1	25,4	CS25 BR654 45°	1.1/4	54	1210G16-20
1210-20-20	R1210.2020	1.1/4	31,8	CS32 BR654 45°	1.1/4	54	
1210-20-24	R1210.2024	1.1/4	31,8	CS32 BR663 45°	1.1/2	63.5	
1210-24-24	R1210.2424	1.1/2	38,1	CS38 BR663 45°	1.1/2	63.5	
1210-24-32	R1210.2432	1.1/2	38,1	CS38 BR680 45°	2	79.4	
1210-32-32	R1210.3232	2	50,8	CS50 BR680 45°	2	79.4	

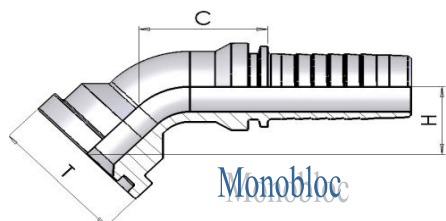


**BR-6 90 L**

**BRIDE 90° SAE 6000 PSI MONOBLOC - PROLONGEE  
90° SAE FLANGE 6000 PSI ONE PIECE - LONG DROP**

Référence part nr.	Référence UNIDRO	Diamètre Tuyau		Désignation	Collet		H mm
		in	mm		in	mm	
<b>FS6L-08-08</b>	<b>R6LFS.0808</b>	1/2	12,7	CS13 BR6L32 90°	1/2	31.7	<b>75</b>
<b>FS6L-12-12</b>	<b>RFS6L.1212</b>	3/4	19	CS19 BR6L41 90°	3/4	41.3	<b>126</b>
<b>FS6L-16-16</b>	<b>RFS6L.1616</b>	1	25,4	CS25 BR6L48 90°	1	47.6	<b>132</b>
<b>FS6L-20-20</b>	<b>RFS6L.2020</b>	1.1/4	31,8	CS32 BR6L54 90°	1.1/4	54	<b>185</b>
<b>FS6L-24-24</b>	<b>R6LFS.2424</b>	1.1/2	38,1	CS38 BR6L63 90°	1.1/2	63.5	<b>233</b>