








CSB**BASE OSCILLANTE
SWINGING END**

Code Code	ØSF	ØD2	ØD	L	H	L1	α	FC (KN)	kg
CSB0500000	50	40	85	82	45	20	38	68.6	2,20
CSB0600000	60	50	98	100	50	25	40	107.8	3,40
CSB0700000	70	60	105	115	60	30	38	132.3	4,80




FC = CHARGE DYN. MAXI - MAX DYNAMIC LOAD

MATERIEL : ACIER UNI C40

MATERIAL : STEEL UNI C40

CSB00**BASE OSCILLANTE
SWINGING END****TYPE A****TYPE B****TYPE C****TYPE D**

Code Code	TYPE	ØSF	ØD2	ØD	L	H	L1	F	LF	α	FC (KN)	kg
CSB0001980	B	45	30	110	62	45	9			35	107.8	2,20
CSB0001982	A	55	45	95	78	55	8			30	147.0	2,88
CSB0001984	B	65	64	107	88	58	9			30	225.5	3,96
CSB0001986	C	45	30	110	61	45		M22x1.5	26	32	107.8	2,28
CSB0001988	D	55	45	95	78	55		M32x2	35	30	147.0	3,10

**TYPE A****TYPE B**

Code Code	TYPE	ØSF	ØD2	ØD	L	H	L1	ØG	α	FC (KN)	kg
CSB0001700 (*)	B	45	36	88	106.0	43.0	63	-	22	78.4	2,18
CSB0001701 (*)	B	45	36	88	106.0	43.0	63	8.4	36	78.4	2,40
CSB0001702 (*)	A	55	36	92	118.5	53.5	65	8.4	33	137.2	3,10

FC = CHARGE DYN. MAXI - MAX DYNAMIC LOAD

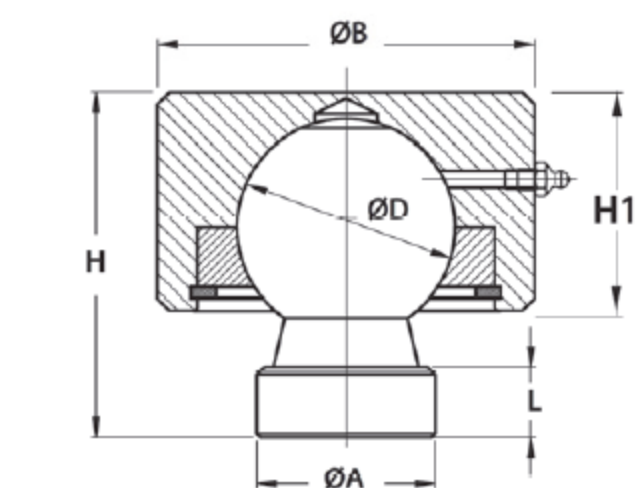
(*) = LE GRAISSEUR EST DEPLACÉ DE 6° ENVIRON POUR FACILITER LE GRAISSAGE

(*) = GREASE NIPPLE IS TILTED OF ABOUT 6° TO FACILITATE GREASING

MATERIEL : ACIER UNI C40

MATERIAL : STEEL UNI C40

BASI OSCILLANTI
SWINGING ENDS



BO...

BASE OSCILLANTE
SWINGING END



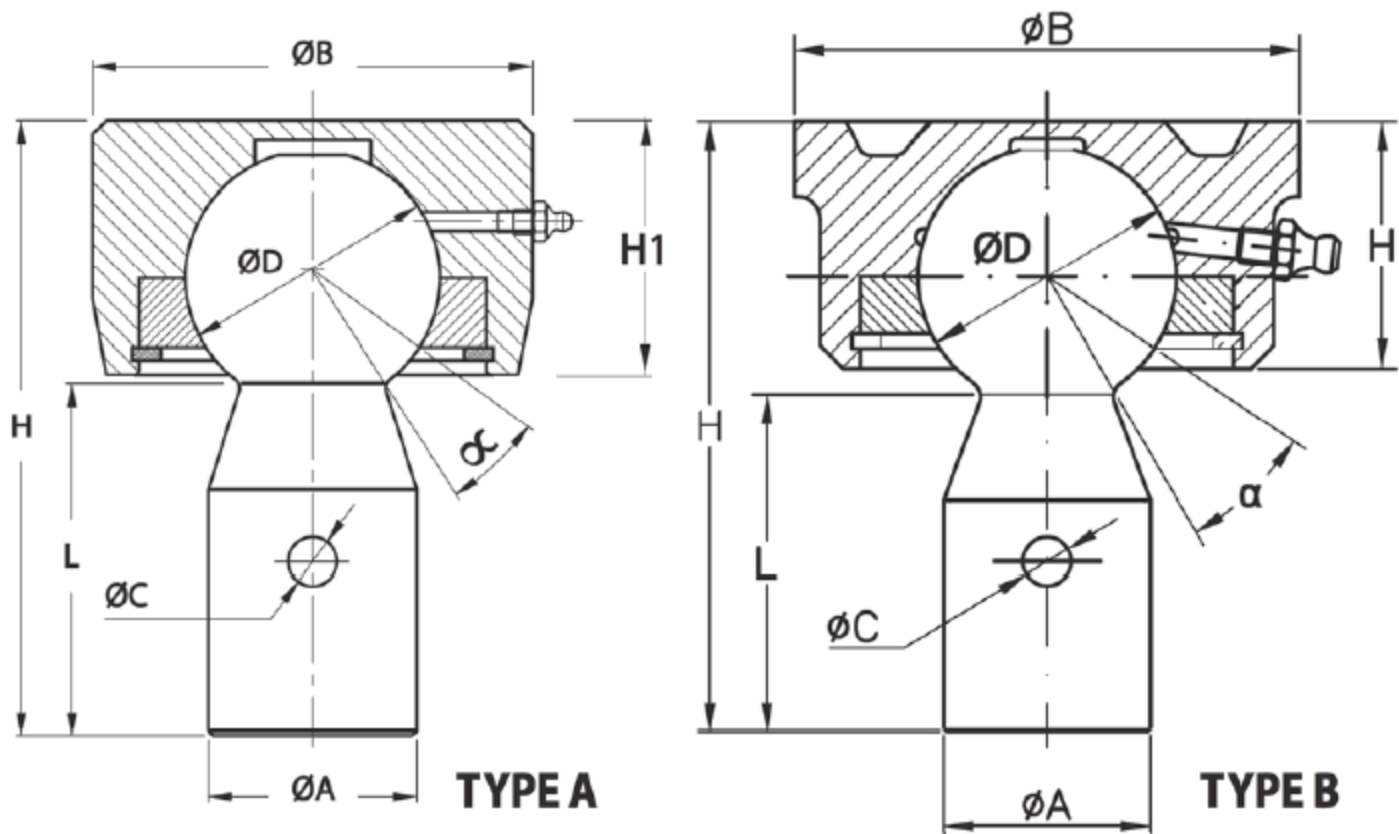
SIGLA ARTICLE	ØD	ØA	ØB	H	H1	L	CARICO LIMITE LOAD FACTORS	α	PESO IN Kg. WEIGHT Kg.
	mm.						TON.		
BO 1803	50	40	85	82	45	20	9.60	38	2.20
BO 1804	60	50	98	100	50	25	15.70	40	3.40
BO 1805	70	60	105	115	60	30	18.90	38	4.82



BO...

BASE OSCILLANTE
SWINGING END

SIGLA ARTICLE	ØD	ØA	ØB	H	H1	L	Df	Lf	CARICO LIMITE LOAD FACTORS	TYPE	α	PESO IN Kg. WEIGHT Kg.
									TON.			
mm.												
BO 1980	45	30	110	62	45	9	-	-	11.0	B	35	2.20
BO 1982	55	45	95	78	55	8	-	-	15.0	A	30	2.88
BO 1984	65	64	107	88	58	9	-	-	23.0	A	30	3.96
BO 1986	45	30	110	61	45	-	M22X1.5	26	11.0	C	32	2.28
BO 1988	55	45	95	78	55	-	M32X2	35	15.0	D	30	3.10



BO...

BASE OSCILLANTE
SWINGING END



SIGLA ARTICLE	ØD	ØA	ØB	ØC	H	H1	L	CARICO LIMITE LOAD FACTORS	TYPE	α	PESO IN Kg. WEIGHT Kg.
	mm.							TON.			
	BO 1700 (1)	45	36	88	-	106	43	64	8.0	B	
BO 1701 (1)	45	36	88	8.4	106	43	58.5	8.0	B	36	2.40
BO 1702 (1)	55	36	92	8.4	118.5	53.5	62	14.0	A	33	3.10

(1) L'INGRASSATORE É INCLINATO DI CIRCA 6° PER FAVORIRE L'INGRASSAGGIO.
(1) THE GREASE NIPPLES IS TILTED ABOUT 6° TO HELP THE LUBRICATION.